

# Silikonekantlister

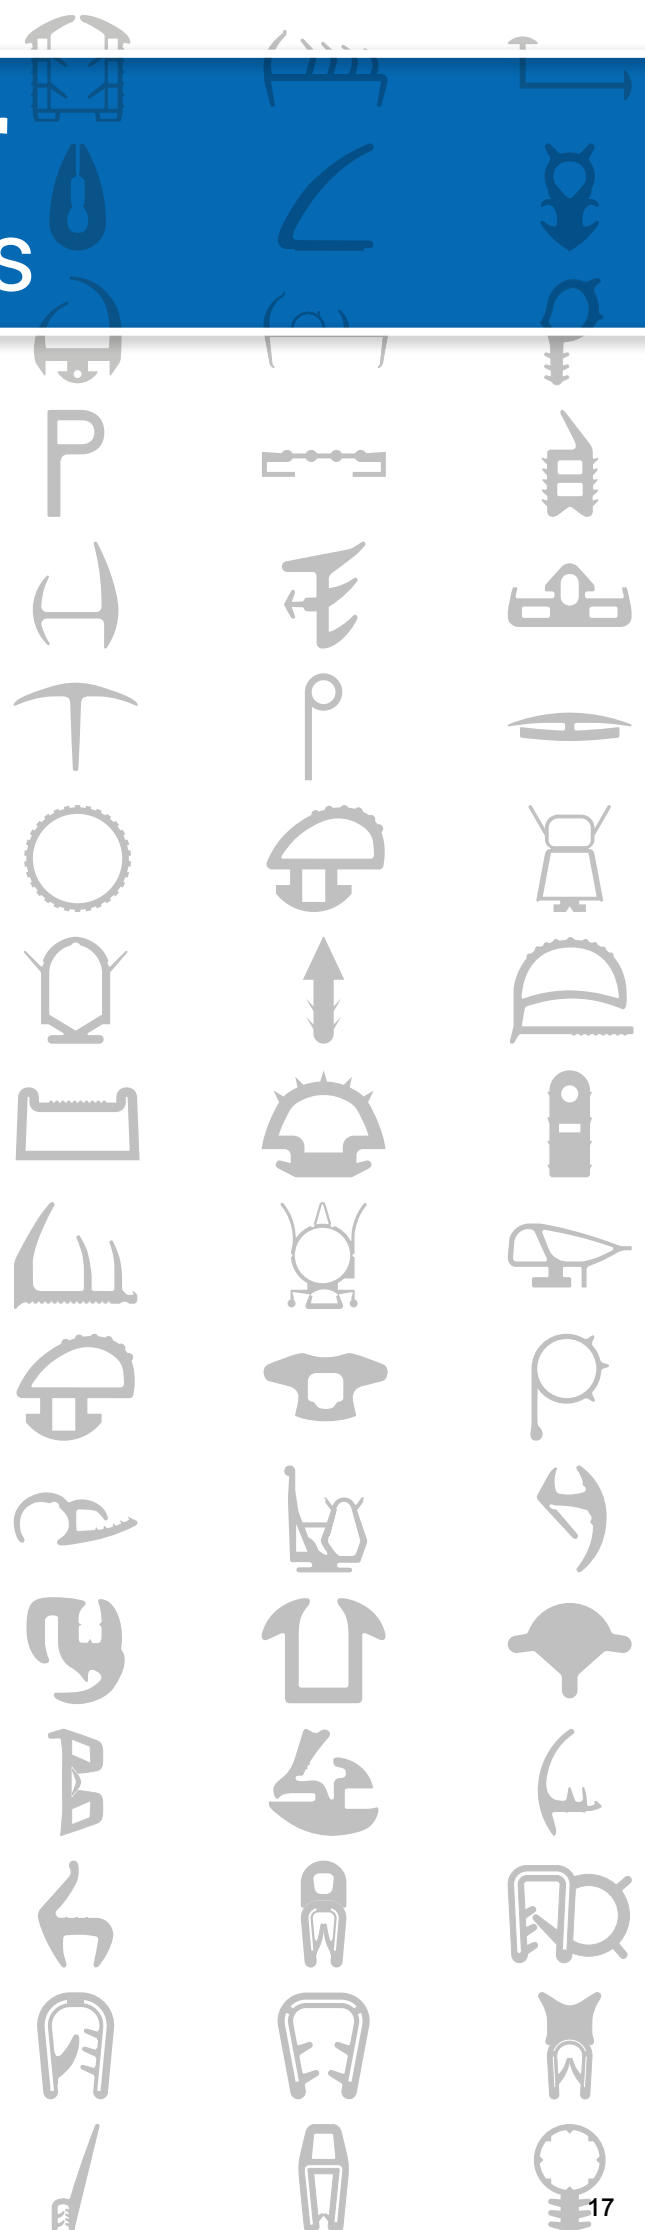
## Silicone edge trims

Silikonekantlister anvendes som andre typer af kantlister. Silikone er dog meget mere resistent overfor højere temperaturer.

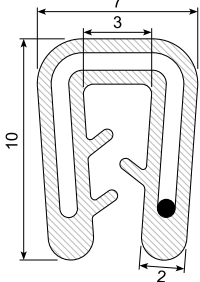
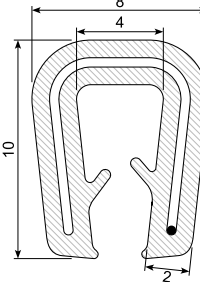
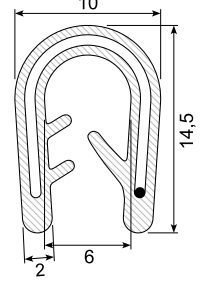
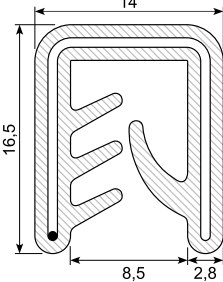
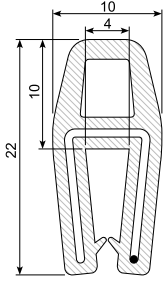
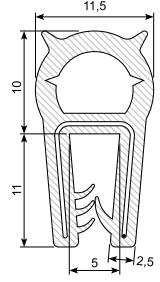
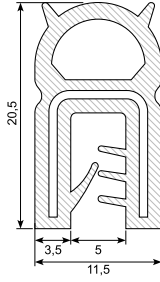
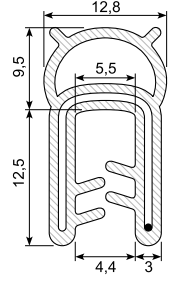
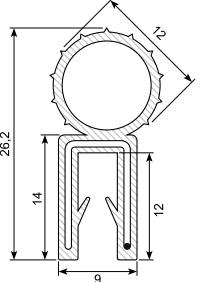
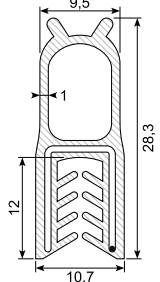
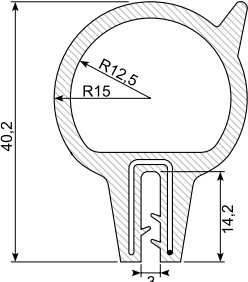
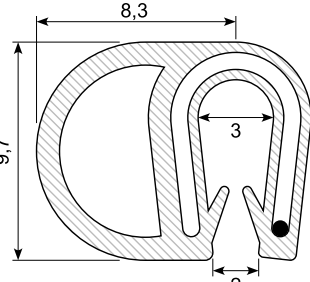
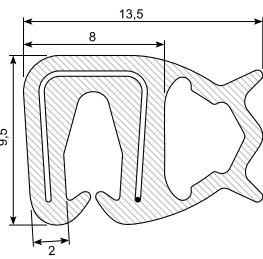
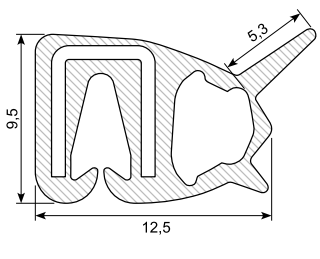
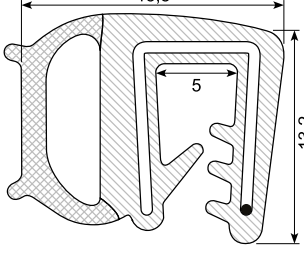
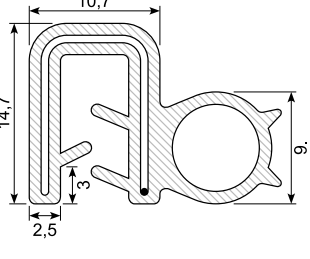
Vi tilbyder ligeledes FDA egnede silikonelister og / eller op til 270 °C varmebestandighed.

The silicone edge trims are used like other types of edge trims, however, silicone is much more resistant to higher temperatures.

We also offer FDA-approved silicone edge trims and / or with heat tolerance up to 270 °C.



# Silikonekantlister / Silicone edge trims

<p><b>33.311</b></p>  <p>Edge trim: Silicone, black Grip range: 1,0 - 2,0 mm Hardness: SH 60 Insert: Wire 18 x 0,76 mm. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>	<p><b>33.510</b></p>  <p>Edge trim: Silicone, black Grip range: 1,0 - 3,0 mm Hardness: SH 60 Insert: Wire 26 x 0,76 mm. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>	<p><b>33.312</b></p>  <p>Edge trim: Silicone, black Grip range: 2,0 - 4,0 mm Hardness: SH 60 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>	<p><b>33.429</b></p>  <p>Edge trim: Silicone, black Grip range: 3,0 - 6,0 mm (5 - 7 mm) Hardness: SH 60 Insert: Wire 39 x 0,76 mm. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>
<p><b>33.511</b></p>  <p>Edge trim: Silicone, black Grip range: 1,5 - 4,0 mm Hardness: SH 50 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>	<p><b>33.512</b></p>  <p>Edge trim: Silicone, black Grip range: 1,0 - 3,5 mm Hardness: SH 50 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>	<p><b>33.513</b></p>  <p>Edge trim: Silicone, black Grip range: 1,5 - 3,5 mm Hardness: SH 50 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>	<p><b>33.431A</b></p>  <p>Edge trim: Silicone, <b>light grey</b> RAL 7035 Grip range: 2,0 - 4,0 mm Hardness: SH 60/60, Solid balloon Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>
<p><b>33.514</b></p>  <p>Edge trim: Silicone Grip range: 1,5 - 3,0 mm Hardness: SH 75 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>	<p><b>33.515</b></p>  <p>Edge trim: Silicone Grip range: 1,0 - 2,5 mm Hardness: SH 75 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>	<p><b>33.516</b></p>  <p>Edge trim: Silicone Grip range: 2,0 - 3,0 mm Hardness: SH 75 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>	<p><b>33.517</b></p>  <p>Edge trim: Silicone Grip range: 2,0 - 3,0 mm Hardness: SH 50 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>
<p><b>33.518</b></p>  <p>Edge trim: Silicone, <b>white</b> Grip range: 1,5 - 2,5 mm Hardness: SH 60 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform Min. order: 500 m</p>	<p><b>33.519</b></p>  <p>Edge trim: Silicone Grip range: 1,0 - 2,0 mm Hardness: SH 45 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>	<p><b>33.520</b></p>  <p>Edge trim: Silicone co-ex Color: Black and redbrown Grip range: 1,5 - 3,0 mm Hardness: SH 60 / density 0,4 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Min. order: 500 m</p>	<p><b>33.521</b></p>  <p>Edge trim: Silicone Grip range: 1,5 - 4,5 mm Hardness: SH 75 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>

# Silikonekantlister / Silicone edge trims

<p><b>33.522X</b> *</p> <p>Edge trim: Silicone Grip range: 2,0 - 4,0 mm Hardness: SH 60 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform Min. order: 500 m</p>	<p><b>33.523</b> *</p> <p>Edge trim: Silicone Grip range: 1,5 - 2,5 mm Hardness: SH 60 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform Min. order: 500 m</p>	<p><b>33.524</b></p> <p>Edge trim: Silicone Grip range: 2,0 - 4,0 mm Hardness: SH 50 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>	<p><b>33.525</b></p> <p>Edge trim: Silicone Grip range: 3,0 - 6,0 mm Hardness: SH 50 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>
<p><b>33.526</b> *</p> <p>Edge trim: Silicone Grip range: 1,0 - 2,5 mm Hardness: SH 65 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>	<p><b>33.527</b></p> <p>Edge trim: Silicone Grip range: 1,0 - 2,5 mm Hardness: SH 65 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>	<p><b>33.528</b></p> <p>Edge trim: Silicone Grip range: 1,0 - 3,0 mm Hardness: SH 60 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>	<p><b>33.529</b> *</p> <p>Edge trim: Silicone Grip range: 1,0 - 1,5 mm Hardness: SH 80 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform Min. order: 500 m</p>
<p><b>33.530</b></p> <p>Edge trim: Silicone Grip range: 3,5 - 5,0 mm Hardness: SH 70 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>	<p><b>33.531</b> *</p> <p>Edge trim: Silicone Grip range: 2,5 - 5,5 mm Hardness: SH 70 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform Min. order: 100 m</p>	<p><b>33.532</b></p> <p>Edge trim: Silicone Grip range: 5,5 - 6,5 mm Hardness: SH 65 Insert: Wire. <b>Stainless can be done: Min. 500 m</b> Heat resistant 200° C Silicone is FDA conform</p>	